

Trilock 60



**BOON EDAM**

The Trilock 60 is an attractively finished tripod turnstile, suited for medium volume, abusive conditions.

Options

- Platform and railing (portable)
- Second counter
- Wheels for moving
- Out-of-use lock
- Manual control
- Indicator lights (green / red)
- Time-out relay
- Pulse relay
- Electromechanical counter
- Push-button
- Rotation direction sensor
- Serial port interfaces

Product Types

- Trilock 60NRS: mechanically operated, non-registering
- Trilock 60MS: mechanically operated, registering
- Trilock 60E: electronically controlled, single or bi-directional traffic.
- Trilock 60T: access through a coin or token system

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system.


 *your entry experts*



Dimensions and Specifications

A				B	C	D	E	F	G
Passage Width (mm)	Capacity / Minute*	Disabled Access	Type of Traffic	Overall Width (mm)	Arm Length (mm)	Arm Height (mm)	Overall Height (mm)	Unit Length (mm)	Unit Width (mm)
444	15-20	x		585	406	838	965	686	178
457	15-20	x		598	457	838	965	686	178

* Depending on access control system, in one direction

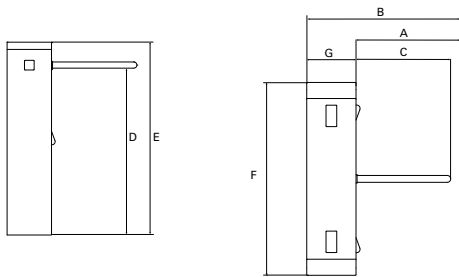

Emergency Egress

The Trilock 60 is available with fail-safe or fail-secure operation. While the fail-secure model ensures that the entrance stays closed in case of emergency or power failure, the fail-safe model will free the passage by allowing free rotation of the arm set or automatically collapsing the horizontal arm down. Alternatively, if a fire alarm is connected, the fail-safe function can automatically be activated upon receipt of a fire alarm signal.

Technical Specifications

Power Supply: 220-240 VAC, 50/60 Hz

Power Consumption
Operating: 220W

Ambient Temperature: -15°C to +50°C
Weight: 65 kg