

# Trilock 75



**The Trilock 75 series is the top of the line tripod turnstile suited to medium capacity, abusive situations. This luxurious Trilock is available with straight or rounded ends to the cabinet. The electronically operated models are capable of independently controlling bi-directional traffic.**

#### **Options**

- Platform and railing (portable)
- Second counter
- Wheels for moving
- Out-of-use lock
- Indicator lights (green / red)
- Time-out relay
- Pulse relay
- Electromechanical counter
- Push-button
- Rotation direction sensor
- Collapsible arm set
- Serial port interfaces

#### **Product Types**

- Trilock 75ES: electronically controlled
- Trilock 75ERN: electronically operated, rounded cabinet
- Trilock 75ET: coin and token collection

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system.






## Dimensions and Specifications

A	B	C	D	E	F	G			
Passage Width (mm)	Capacity / Minute*	Disabled Access	Type of Traffic	Overall Width (mm)	Arm Length (mm)	Arm Height (mm)	Overall Height (mm)	Unit Length (mm)	Unit Width (mm)
444	15-20	x		610	394	800	965	914	203
493	15-20	x		711	443	830	965	914	203

\* Depending on access control system, in one direction

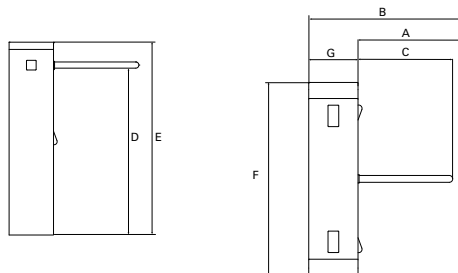

## Emergency Egress

The Trilock 75 is available with fail-safe or fail-secure operation. While the fail-secure model ensures that the entrance stays closed in case of emergency or power failure, the fail-safe model will free the passage by allowing free rotation of the arm set or automatically collapsing the horizontal arm down. Alternatively, if a fire alarm is connected, the fail-safe function can automatically be activated upon receipt of a fire alarm signal.

## Technical Specifications

Power Supply: 220-240 VAC, 50/60 Hz

### Power Consumption

Operating: 220W

Ambient Temperature: -15°C to +50°C

Weight: 90 kg